


AWP04 Architectural Wall Pack

Power Selectable | 3CCT | 120-347V

Meet the successor to our AWP03 series Wall Packs, **now power and colour selectable!**
Ideal for building entrances, multi-use facilities, apartment buildings, institutions, schools, and more

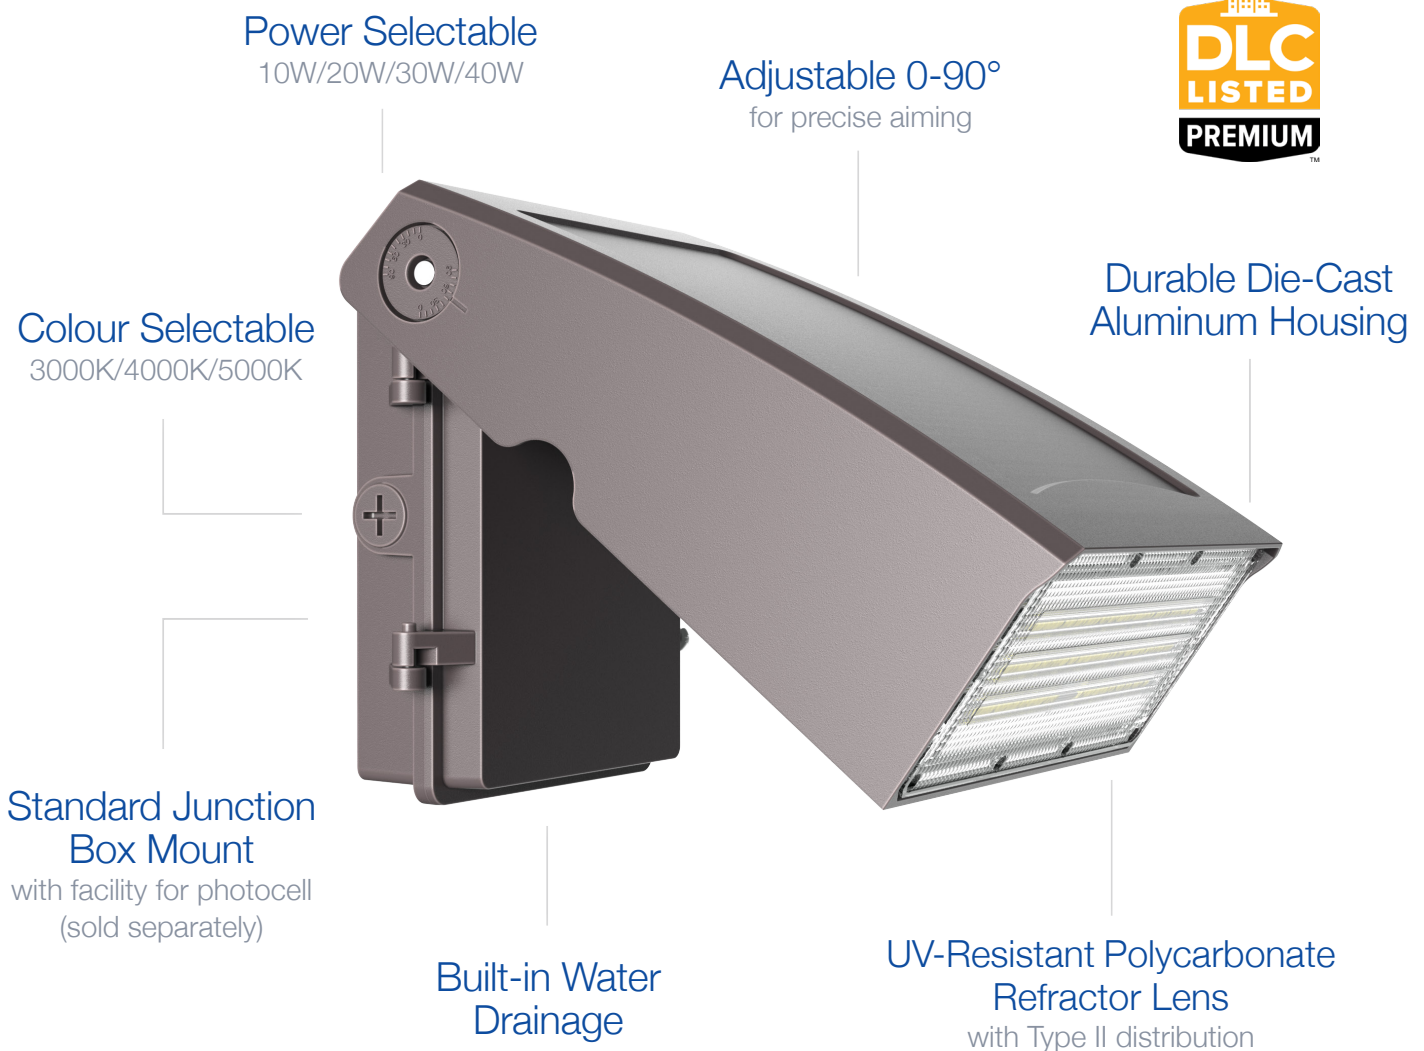

TECHNICAL DATA



LIGHT SPECIFICATIONS


Efficacy	126.47 lm/W
CCT	3000K/4000K/5000K
CRI	72
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	10-year
Factory Settings	40W 5000K

APPROVALS AND LISTINGS

cETL	5018387
DLC Premium	S-0W9LD6

LUMEN OUTPUT			
	3000K	4000K	5000K
10W	1712 lm	1793 lm	1838 lm
20W	3360 lm	3571 lm	3573 lm
30W	4772 lm	5136 lm	5054 lm
40W	5059 lm	6213 lm	6024 lm

LUMINOUS INTENSITY DISTRIBUTION

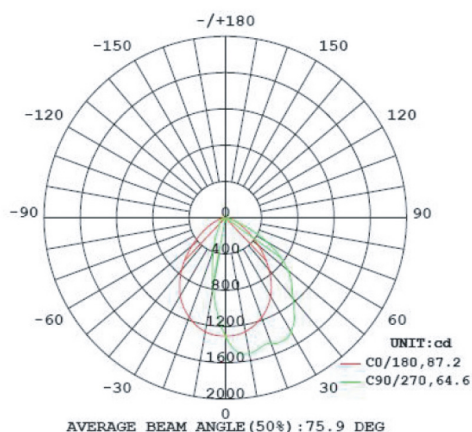

ELECTRICAL

Wattage	10W/20W/30W/40W
Voltage	120-347V
Current	0.45A
Power Factor	0.9
THD	15%
Operating Temp	-40 to 45°C
Operating Temp (with Sensor)	-20 to 45°C

CONSTRUCTION

Housing	Die-Cast Aluminum
Lens	Polycarbonate
Finish	Bronze
IP Rating	IP65


DIMENSIONS AND WEIGHTS

Fixture Weight	3.5 lbs
Fixture Dimensions	11 x 8.5 x 4.4 in
Carton Qty	1
Carton Weight	4.2 lbs
Carton Dimensions	13 x 9.6 x 5.9 in

ACCESSORIES (Sold Separately)

HD06VCRH	Photocell
HD06-TUBE	Tube Extension for HD06VCRH (required)
HB01DMS-C	Motion Sensor

DIMENSIONS



HEAD OFFICE: 8 - 540 Jamieson Pkwy, Cambridge, ON, N3C 0G5 | orders@csc-led.com | (519) 880 - 9833