


AWP04 Architectural Wall Pack

Power Selectable | 3CCT | 120-347V

Meet the successor to our AWP03 series Wall Packs, **now power and colour selectable!**
Ideal for building entrances, multi-use facilities, apartment buildings, institutions, schools, and more

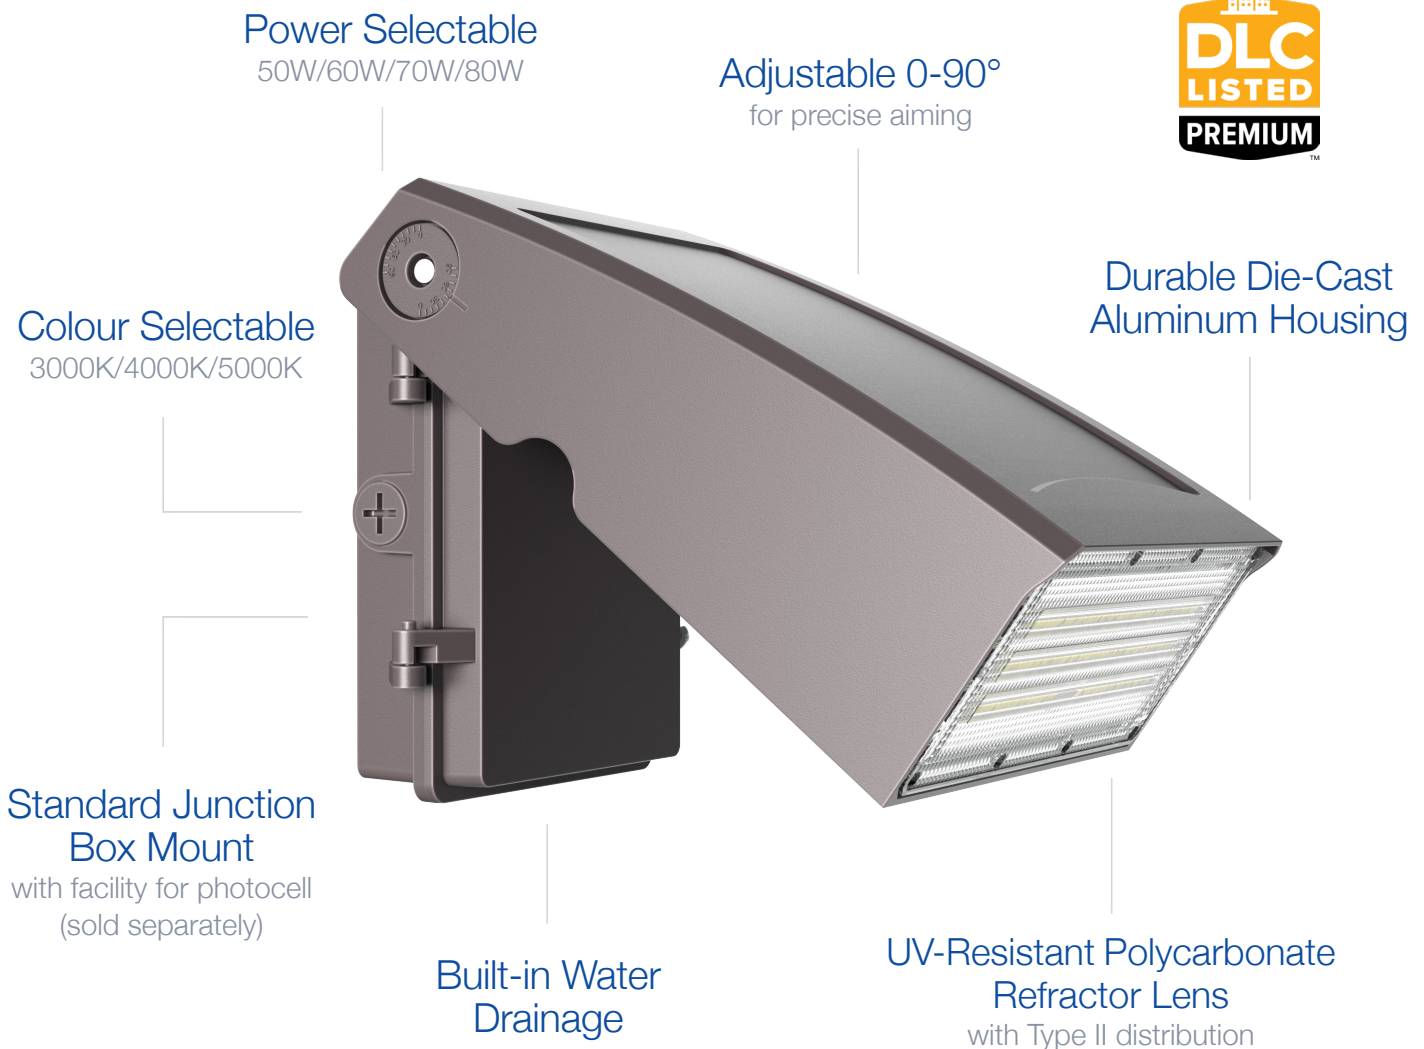

TECHNICAL DATA



LIGHT SPECIFICATIONS

Efficacy	124.86 lm/W
CCT	3000K/4000K/5000K
CRI	72
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	10-year
Factory Settings	80W 5000K


LUMEN OUTPUT

	3000K	4000K	5000K
50W	6528 lm	6814 lm	6593 lm
60W	7698 lm	8091 lm	7752 lm
70W	9048 lm	9660 lm	9060 lm
80W	9966 lm	11121 lm	10844 lm

APPROVALS AND LISTINGS

cETL	5018387
DLC Premium	S-BYZP7D

LUMINOUS INTENSITY DISTRIBUTION

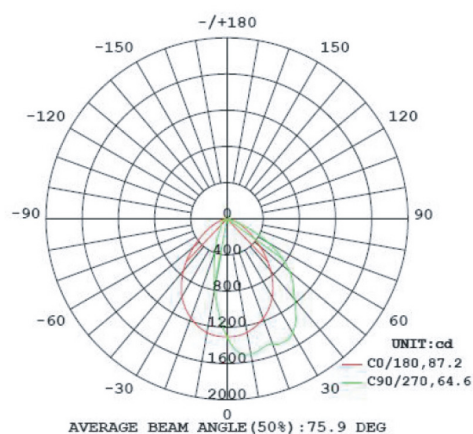

ELECTRICAL

Wattage	50W/60W/70W/80W
Voltage	120-347V
Current	1.05A
Power Factor	0.934
THD	12.1%
Operating Temp	-40 to 45°C
Operating Temp (with Sensor)	-20 to 45°C

CONSTRUCTION

Housing	Die-Cast Aluminum
Lens	Polycarbonate
Finish	Bronze
IP Rating	IP65


DIMENSIONS AND WEIGHTS

Fixture Weight	6.9 lbs
Fixture Dimensions	13 x 10.5 x 5 in
Carton Qty	1
Carton Weight	8.2 lbs
Carton Dimensions	14.8 x 11.6 x 7.1 in

ACCESSORIES (Sold Separately)

HD06VCRH	Photocell
HD06-TUBE	Tube Extension for HD06VCRH (required)
HB01DMS-C	Motion Sensor

DIMENSIONS

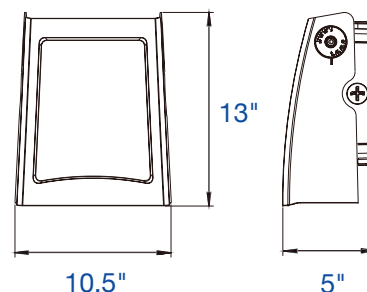HEAD OFFICE: 8 - 540 Jamieson Pkwy, Cambridge, ON, N3C 0G5 | orders@csc-led.com | (519) 880 - 9833