



PRODUCT
CODE(S):

NOTES:

TYPE:

Interactive PDF. Click to type.

BL01 Bollard

Power Selectable | 3CCT | 120-347V

Suitable for pathways, gardens, sidewalks, building entrances, and other landscapes that require low to the ground illumination

Choose from 19", 35",
and 42" Base Poles

Power Selectable 14W Maximum

25% / 50% / 75% / 100% field adjustable

3CCT Selectable

3000K / 4000K / 5000K

120-347V Universal Driver

Polyester Powder
Coat Finish

Black

Vandal Resistant

IK10

DarkSky Approved

when set to 3000K operation



BL01-14W-4P-3CCT-UD

*PICTURED WITH BASE POLES (SOLD SEPARATELY)





LIGHT ENGINE



BL01-14W-4P-3CCT-UD



*PICTURED WITH BASE POLE
(SOLD SEPARATELY)

Each luminaire has four power and three colour options and is equipped with a 120-347V universal driver that is suitable for almost all applications. With easy adjustability, you can configure each luminaire to meet the unique requirements of your project! This series is housed in aluminum alloy, and is vandal-resistant (rated IK10), making it the perfect choice for your next project!

BASE POLES



BL01-BASE19



BL01-BASE35



BL01-BASE42

Choose from 19", 35", and 42" Base Poles

NOTE: One Base Pole is required per Light Engine. Base Poles are sold separately.

19", 35", and 42" represent **total** height of the luminaire **including Base Pole and Light Engine**.

MOUNTING



Mounting Plate
**INCLUDED WITH
BASE POLE**



Anchor Bolts & Plate
SOLD SEPARATELY
(BL01-PLATE)

SPILL CONTROL



Visor
SOLD SEPARATELY
(BL01-VISOR)



WET CONCRETE INSTALLATION:

Anchor Bolts & Plate (BL01-PLATE) are **required** for wet concrete installation.

TECHNICAL DATA

LIGHT SPECIFICATIONS


Lumens	1,680 lm
Efficacy	120 lm/W
CCT	3000K/4000K/5000K
CRI	80
Beam Angle	Type V
L70 Life	60,000 hrs
Warranty	10-year
Factory Settings	14W 5000K

APPROVALS AND LISTINGS

cETL	5009705
IK10	Yes
IP66	Yes

DIMENSIONS

NOTE: 19", 35", and 42" represent **total** height of the luminaire **including Base Pole and Light Engine**

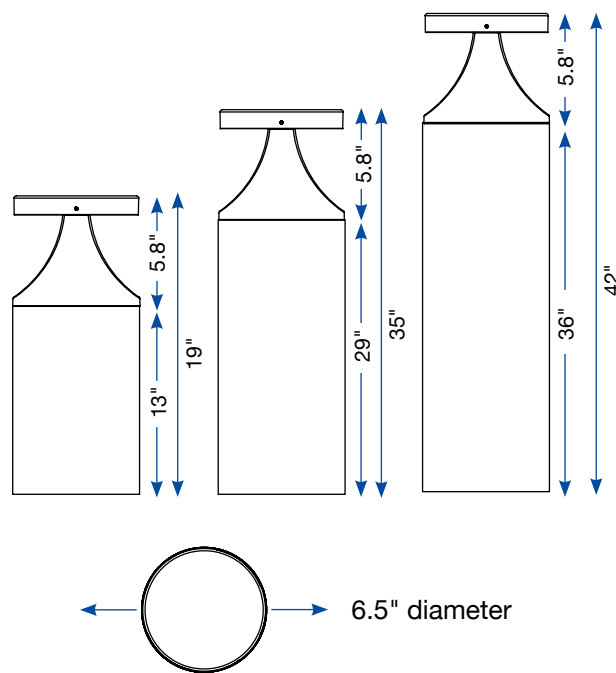

ELECTRICAL

Wattage	14W maximum (field adjustable to 25%, 50%, 75% or 100%)
Voltage	120-347V
Current	0.3A
Surge Protection	2kV
Auxiliary Output	N/A
Power Factor	0.9
THD	20%
Operating Temp	-40 to 50°C

CONSTRUCTION

Housing	Aluminum Alloy
Lens	Polycarbonate
Finish	Powder Coat
Finish Colour	Black

DIMENSIONS & WEIGHTS

Fixture Weight	5.4 lbs
Fixture Dimensions	Polycarbonate
Carton Qty	1
Carton Weight	6.5 lbs
Carton Dimensions	13.8 x 8.7 x 8.7 in

ACCESSORIES (SOLD SEPARATELY)

BL01-BASE19	19" Pole & Base Plate
BL01-BASE35	35" Pole & Base Plate
BL01-BASE42	42" Pole & Base Plate
BL01-PLATE	Anchor Bolts & Plate
BL01-VISOR	Visor

NOTE: One Base Pole (19", 35", or 42") is required per Light Engine. Base Poles are sold separately.

WET CONCRETE INSTALLATION: Anchor Bolts & Plate (BL01-PLATE) are **required** for wet concrete installation.

BRITISH COLUMBIA

1140-2375 Fremont St, Port Coquitlam,
BC V3B 0N9 | (778) 730-0448

ALBERTA

13-2355 52 Ave SE, Calgary, AB
T2C 4X7 | (403) 907-0212

ONTARIO

8-540 Jamieson Pkwy, Cambridge, ON
N3C 0G5 | (519) 880-9833