

KEYSTONE Wall Pack

10W / 15W / 20W | 3000K | 120-347V

Combines full-cutoff performance with a clean design suited to commercial and industrial building exteriors.

PRODUCT CODES: KWP-20W-3P-3CCT-UD-BK, KWP-20W-3P-3CCT-UD-BZ, KWP-20W-3P-3CCT-UD-WH



3CCT



120-347V



CONTROL
READY



BUILT-IN
PHOTOCELL



IP65



eco



Certified by DarkSky.org

Power Selectable

10W / 15W / 20W

120-347V Universal Driver

0-10V dimming

Available in Black (BK),
Bronze (BZ), and White (WH)

Built-in Photocell

unplug to bypass

Type II Optics Standard

Type III and Type IV
Interchangeable Optics
sold separately

Motion Sensor Compatible

sold separately

DarkSky Approved

when set to 3000K operation



TECHNICAL DATA



LIGHT SPECIFICATIONS

Efficacy	150 lm/W
CCT	3000K
CRI	>80
Distribution	Type II
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	10-year
Factory Settings	20W 4000K

LUMEN OUTPUT	
	3000K
10W	1510 lm
15W	2081 lm
20W	2705 lm


APPROVALS & LISTINGS

cUL	E482965
-----	---------

DIMENSIONS AND WEIGHTS

Fixture Weight	1.6 lbs
Fixture Dimensions	6.07 x 5.56 x 3.07 in
Carton Qty	1
Carton Weight	1.74 lbs
Carton Dimensions	6.26 x 5.71 x 3.35 in

DIMENSIONAL DRAWINGS (IN)

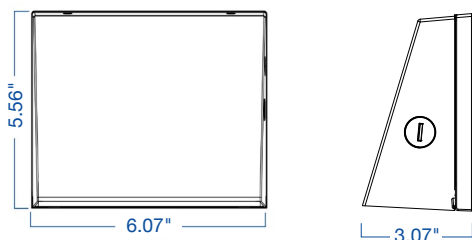

ELECTRICAL

Wattage	10W/15W/20W
Voltage	120-347V
Current	0.16A
Surge Protection	4kV
Auxiliary Output	12V
Power Factor	0.9
THD	25%
Operating Temp	-40 to 50°C
Operating Temp (with Sensor)	-25 to 50°C

CONSTRUCTION

Housing	Die-Cast Aluminum
Lens	Polycarbonate
Finish	Powder Coated
Finish Colour	Black / Bronze / White
IP Rating	IP65

ACCESSORIES (Sold Separately)

Infrared Motion Sensor	MS01-PIR-TW-DC*
Microwave Motion Sensor	MS04-MW-TW-DC*
Motion Sensor Knuckle Mount	MS-KN01-XX**
Back Plate	KWP-BKPL-XS-XX**
Type III Optics	KWP-TYPE-III-XS
Type IV Optics	KWP-TYPE-IV-XS
Motion Sensor Remote	MS04-RC

NOTE: MS04-RC is required for Microwave and Infrared Motion Sensors to function.

* MS-KN01-XX and KWP-BKPL-XS-XX are required to use the motion sensors with KWP-20W-3P-3CCT-UD-XX models

**Where -XX denotes finish colour