CSCLED

PRODUCT CODE(S):	
NOTES:	
TYPE:	

Interactive PDF. Click to type.

VT Vapour Tights

Power and 3CCT Selectable | 120-347V | 2', 4', 8'

Ideal for parking garages, car washes, industrial applications,
food processing plants, paint shops, and other harsh environments

Power Selectable
3 or 4 power settings per product

3CCT Selectable
3500K / 4000K / 5000K

120-347V Universal Driver
0-10V dimming

Stainless Steel Spring Clips

One Piece Gear Tray
for quick access to driver
and accessories

Low-Glare Polycarbonate Lens
for high durability

1/2" NPT Entry





3CCT 120-347V NEMA 4X

LIGHT SPECIFICATIONS AND ELECTRICAL



PRODUCT CODE	WATTS	CCT	LUMENS	EFFICACY	CRI	THD	FACTORY SETTINGS	MAX CURRENT
VT2-25W-3P-3CCT-UD	15W	3500K	2283 lm	152 lm/W	84	10.8%	25W 5000K	0.5A
		4000K	2338 lm	156 lm/W				
		5000K	2304 lm	154 lm/W				
	20W	3500K	2709 lm	135 lm/W				
		4000K	2784 lm	139 lm/W				
		5000K	2741 lm	137 lm/W				
	25W	3500K	3369 lm	135 lm/W				
		4000K	3517 lm	141 lm/W				
		5000K	3431 lm	137 lm/W				
VT4-35W-3P-3CCT-UD	20W	3500K	2747 lm	137 lm/W	86	15.1%	35W 5000K	0.5A
		4000K	2839 lm	142 lm/W				
		5000K	2797 lm	140 lm/W				
	28W	3500K	3853 lm	138 lm/W				
		4000K	4007 lm	143 lm/W				
		5000K	3972 lm	142 lm/W				
	35W	3500K	4714 lm	135 lm/W				
		4000K	4977 lm	142 lm/W				
		5000K	4896 lm	140 lm/W				
VT4-60W-3P-3CCT-UD	30W	3500K	4425 lm	148 lm/w	85	15.8%	60W 5000K	0.8A
		4000K	4550 lm	152 lm/w				
		5000K	4520 lm	151 lm/w				
	45W	3500K	6378 lm	142 lm/w				
		4000K	6585 lm	146 lm/w				
		5000K	6529 lm	145 lm/w				
	60W	3500K	7947 lm	132 lm/w				
		4000K	8333 lm	139 lm/w				
		5000K	8190 lm	137 lm/w				

PRODUCT CODE	WATTS	CCT	LUMENS	EFFICACY	CRI	THD	FACTORY SETTINGS	MAX CURRENT
VT4-105W-4P-3CCT-UD	70W	3500K	9990 lm	143 lm/W	85	14.3%	105W 5000K	1.1A
		4000K	10214 lm	146 lm/W				
		5000K	10150 lm	145 lm/W				
	80W	3500K	11279 lm	141 lm/W				
		4000K	11596 lm	145 lm/W				
		5000K	11520 lm	144 lm/W				
	90W	3500K	11941 lm	133 lm/W				
		4000K	12240 lm	136 lm/W				
		5000K	12155 lm	135 lm/W				
	105W	3500K	13981 lm	133 lm/W				
		4000K	14783 lm	141 lm/W				
		5000K	14698 lm	140 lm/W				
VT4-200W-3P-3CCT-UD	150W	3500K	21892 lm	146 lm/W	84	12.7%	200W 5000K	2.0A
		4000K	23393 lm	156 lm/W				
		5000K	23256 lm	155 lm/W				
	175W	3500K	25060 lm	143 lm/W				
		4000K	26970 lm	154 lm/W				
		5000K	26850 lm	153 lm/W				
	200W	3500K	28379 lm	142 lm/W				
		4000K	30950 lm	155 lm/W				
		5000K	30934 lm	155 lm/W				
VT8-110W-4P-3CCT-UD	65W	3500K	9699 lm	149 lm/w	83	9.5%	110W 5000K	0.6A
		4000K	10025 lm	154 lm/w				
		5000K	9818 lm	151 lm/w				
	75W	3500K	11048 lm	147 lm/w				
		4000K	11427 lm	152 lm/w				
		5000K	11188 lm	149 lm/w				
	90W	3500K	12856 lm	143 lm/w				
		4000K	13333 lm	148 lm/w				
		5000K	13047 lm	145 lm/w				
	110W	3500K	15554 lm	141 lm/w				
		4000K	15881 lm	144 lm/w				
		5000K	15508 lm	141 lm/w				

Dimmable	0-10V	Surge Protection	2kV
L70 Life	50,000 hrs	Auxiliary Output	12V
Voltage	120-347V	Power Factor	≥ 0.9
Warranty	5-year	Operating Temp	-40°C to 40°C

DLC INFORMATION

PRODUCT CODE	PRIMARY USE	DLC ID	CLASSIFICATION
VT2-25W-3P-3CCT-UD	Stairwell and Passageway Luminaires	S-8DN5T3	Premium
	Direct Linear Ambient Luminaires	S-R4CFLO	Standard
VT4-35W-3P-3CCT-UD	Stairwell and Passageway Luminaires	S-AR3ION	Premium
	Direct Linear Ambient Luminaires	S-VKND8O	Premium
VT4-60W-3P-3CCT-UD	Stairwell and Passageway Luminaires	S-ZA1MJ8	Premium
	Low-Bay Luminaires for Commercial and Industrial Buildings	S-RHP140	Premium
	Direct Linear Ambient Luminaires	S-HG5A9L	Standard
VT4-105W-4P-3CCT-UD	High-Bay Luminaires for Commercial and Industrial Buildings	S-FH4Q07	Premium
	Direct Linear Ambient Luminaires	S-0ZL3JL	Standard
VT4-200W-3P-3CCT-UD	High-Bay Luminaires for Commercial and Industrial Build	S-Q06GYS	Premium
	Direct Linear Ambient Luminaires	S-W30LGQ	Standard
VT8-110W-4P-3CCT-UD	High-Bay Luminaires for Commercial and Industrial Build	S-PUF6XT	Premium
	Stairwell and Passageway Luminaires	S-9VC8KG	Premium

APPROVALS & LISTINGS

ETL	5001780
IP Rating	Narrow Body: IP66* Wide Body: IP67†
IK Rating	IK08

*When used with optional MS-KN01-WH, this luminaire is rated IP65

† Models VT4-1-5W/150W/200W

CONSTRUCTION

Housing	Polycarbonate
Lens	Polycarbonate
Finish Colour	White/Grey

ACCESSORIES (Sold Separately)

Motion Sensor	MS04-MW-HW-DC
Motion Sensor	VTHB-IMS
Remote Control	MS01-RC
Emergency LED Driver	BLD-YT08D
Motion Sensor Knuckle Mount	MS-KN01-WH
Surge Protector	SPD07-10MV
Tamper-Resistant Screw Kit	VT-TRK



MS01-MW-HW-DC



VTHB-IMS



BLD-YT08D



MS-KN01-WH



SPD07-10MV



MS01-RC

IMPORTANT ACCESSORY NOTES:


MS04-MW-HW-DC **REQUIRES** MS01-RC for use


1 x VT-TRK required per 2' and 4' fixture


2 x VT-TRK required per 8' fixture

VT-TRK requires TR20 bit for installation and is not included.

MEASUREMENTS (IN) & WEIGHTS (LBS)

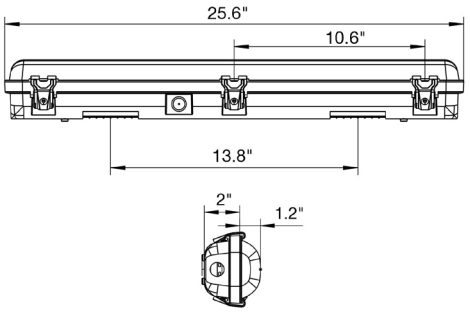

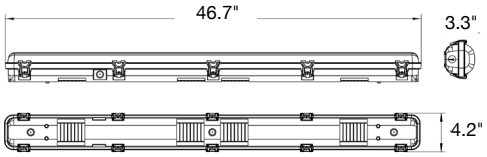


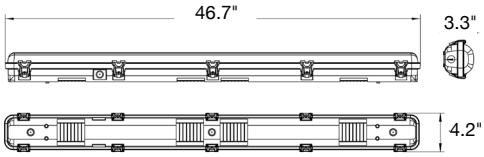



VT2-25W-3P-3CCT-UD	
Luminaire	
Meas.	25.6" x 3.3" x 4.1"
Weight	2.2 lbs
Carton	
Qty	1
Gross Weight	3.3 lbs
Dimensions	25.8" x 3.9" x 4.4"
Master Carton	
Qty	4
Gross Weight	13.2 lbs
Dimensions	26" x 9.1" x 10.2"

VT4-35W-3P-3CCT-UD	
Luminaire	
Meas.	46.7" x 4.2" x 3.3"
Weight	4.9 lbs
Carton	
Qty	1
Gross Weight	5.6 lbs
Dimensions	46.8" x 4.7" x 3.6"
Master Carton	
Qty	4
Gross Weight	24.8 lbs
Dimensions	47.5" x 9.6" x 8.4"

VT4-60W-3P-3CCT-UD	
Luminaire	
Meas.	46.7" x 4.2" x 3.3"
Weight	5.1 lbs
Carton	
Qty	1
Gross Weight	5.8 lbs
Dimensions	46.8" x 4.7" x 3.6"
Master Carton	
Qty	4
Gross Weight	25.6 lbs
Dimensions	47.5" x 9.6" x 8.4"

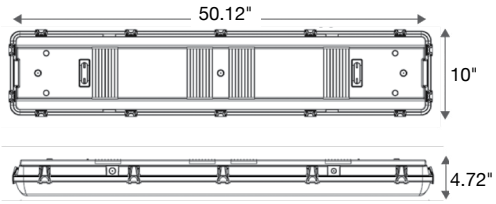

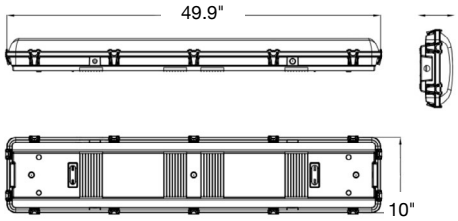



VT4-105W-4P-3CCT-UD	
Luminaire	
Meas.	50" x 4.7" x 10"
Weight	14.55 lbs
Carton	
Qty	1
Gross Weight	17 lbs
Dimensions	51" x 10.8" x 5.5"

VT4-200W-3P-3CCT-UD	
Luminaire	
Meas.	49.9" x 10" x 4.3"
Weight	15 lbs
Carton	
Qty	1
Gross Weight	17 lbs
Dimensions	51" x 10.8" x 5.5"

VT8-110W-4P-3CCT-UD	
Luminaire	
Meas.	92" x 3.3" x 4.3"
Weight	10.5 lbs
Carton	
Qty	1
Gross Weight	12.3 lbs
Dimensions	94" x 4" x 4.7"

BRITISH COLUMBIA
1140-2375 Fremont St, Port Coquitlam, BC V3B 0N9 | (778) 730-0448

ALBERTA
13-2355 52 Ave SE Calgary, AB T2C 4X7 | (403) 907-0212

ONTARIO
8-540 Jamieson Pkwy, Cambridge, ON N3G 0G5 | (519) 880-9833