

WCYL Wall Cylinder

10W/20W/30W | 3CCT | 120-347V

Suitable for indoor and outdoor applications including retail stores, event spaces, hospitality venues, condominiums, building entrances, and more!

Power Selectable

10W / 20W / 30W

3CCT Selectable

3000K / 4000K / 5000K

Direct / Indirect

50% uplight, 50% downlight

Cylinder Ring Illuminates

Built-In Photocell

unplug to bypass

120-347V Universal Driver

0-10V dimming

Powder Coat Finish

black



WCYL-DI-30W-3P-3CCT-UD



LIGHT SPECIFICATIONS AND ELECTRICAL



Efficacy	112 lm/W
CCT	3000K/4000K/5000K
CRI	>80
Distribution	Direct / Indirect (50% downlight, 50% uplight)
Beam Angle	60°
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	10-year
Factory Settings	30W 4000K

LUMEN OUTPUT			
	3000K	4000K	5000K
10W	913 lm	913 lm	972 lm
20W	2086 lm	2192 lm	2230 lm
30W	2796 lm	3079 lm	3203 lm

APPROVALS & LISTINGS

cUL	E482965
-----	---------

DIMENSIONS AND WEIGHTS


Fixture Weight	3.13 lbs
Fixture Dimensions	4.72 x 10.35 x 4.76 in
Master Carton Qty	6
Master Carton Weight	22.84 lbs
Master Carton Dimensions	16.14 x 11.81 x 11.42 in
Carton Qty	1
Carton Weight	3.44 lbs
Carton Dimensions	11.22 x 5.12 x 5.31 in

Wattage	10W/20W/30W
Voltage	120-347V
Current	0.2A
Surge Protection	6kV
Auxiliary Output	N/A
Power Factor	0.9
THD	≤15%
Operating Temp	-40 to 50°C

CONSTRUCTION

Housing	Die-Cast Aluminum
Lens	Glass
Finish	Powder Coated
Finish Colour	Black
IP Rating	IP65

DIMENSIONAL DRAWINGS (IN)

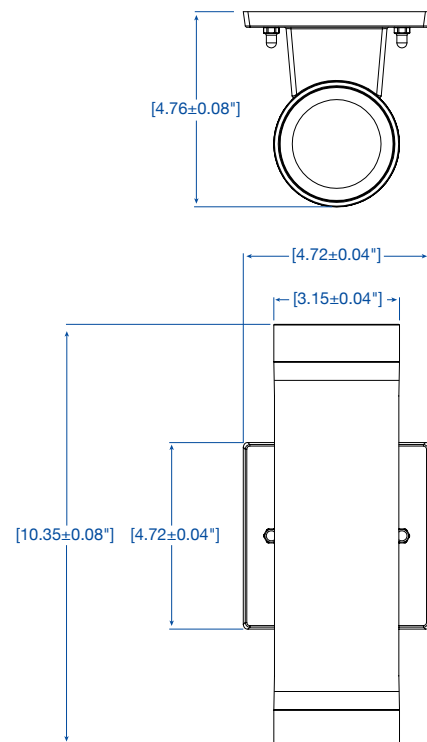

BRITISH COLUMBIA

1140-2375 Fremont St, Port Coquitlam,
BC V3B 0N9 | (778) 730-0448

ALBERTA

13-2355 52 Ave SE Calgary, AB
T2C 4X7 | (403) 907-0212

ONTARIO

8-540 Jamieson Pkwy, Cambridge, ON
N3C 0G5 | (519) 880-9833