

WCYL Wall Cylinder

30W | RGBW | 120-277V

Suitable for indoor and outdoor applications including retail stores, event spaces, hospitality venues, condominiums, building entrances, and more!

Power

30W

CCT

RGBW

16 Colours

and 5 operating modes

120-277V

Direct / Indirect

50% uplight, 50% downlight

Cylinder Ring Illuminates

Remote Control Included

for colour and operating
mode selection

Powder Coat Finish

black



WCYL-DI-30W-RGBW-LV





LIGHT SPECIFICATIONS AND ELECTRICAL

Efficacy*	41 lm/W
CCT	RGBW
CRI	>80
Distribution	Direct / Indirect (50% downlight, 50% uplight)
Beam Angle	60°
L70 Life	50,000 hrs
Warranty	10-year
Factory Settings	30W White

*When set to White

LUMEN OUTPUT				
	Red	Green	Blue	White
30W	270 lm	899 lm	191 lm	1230 lm

APPROVALS & LISTINGS

cUL E482965

DIMENSIONS AND WEIGHTS


Fixture Weight	3.13 lbs
Fixture Dimensions	4.72 x 10.35 x 4.76 in
Master Carton Qty	6
Master Carton Weight	22.84 lbs
Master Carton Dimensions	16.14 x 11.81 x 11.42 in
Carton Qty	1
Carton Weight	3.44 lbs
Carton Dimensions	11.22 x 5.12 x 5.31 in

Wattage	30W
Voltage	120-277V
Current	0.2A
Surge Protection	6kV
Auxiliary Output	N/A
Power Factor	0.9
THD	≤15%
Operating Temp	-40 to 50°C

CONSTRUCTION

Housing	Die-Cast Aluminum
Lens	Glass
Finish	Powder Coated
Finish Colour	Black
IP Rating	IP65

DIMENSIONAL DRAWINGS (IN)

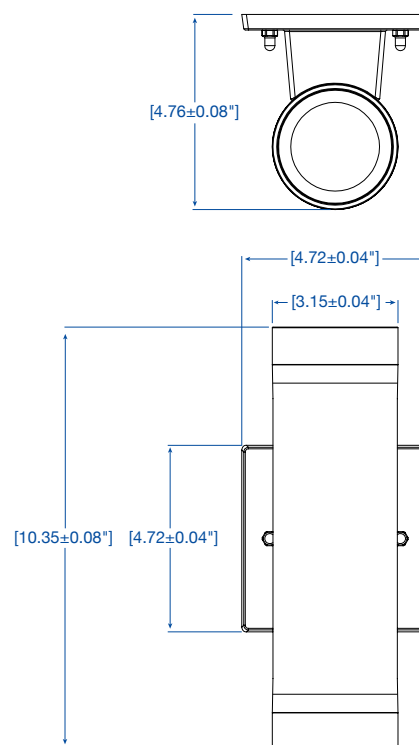

BRITISH COLUMBIA

1140-2375 Fremont St, Port Coquitlam,
BC V3B 0N9 | (778) 730-0448

ALBERTA

13-2355 52 Ave SE Calgary, AB
T2C 4X7 | (403) 907-0212

ONTARIO

8-540 Jamieson Pkwy, Cambridge, ON
N3C 0G5 | (519) 880-9833