



PRODUCT
CODE(S):

NOTES:

TYPE:

Interactive PDF. Click to type.

CWPS Slim Wall Packs

Power and 3CCT Selectable | 120-347V

Budget-friendly, versatile, and slim wall pack that fits virtually all outdoor general purpose lighting applications. Large footprint gives the coverage you need to replace old legacy wall packs!

Power Selectable

20W / 30W / 40W
40W / 60W / 80W
80W / 100W / 120W

3CCT Selectable

3000K / 4000K / 5000K

120-347V Universal Driver

0-10V dimming

Wet Location Rated

IP65

Built-in Photocell

unplug to bypass

Classic Look With a Slim
Redesign and Large Footprint
retrofit friendly

Borosilicate Glass Lens Resists
Thermal Expansion, Stress,
and is Chemical Resistant
will never yellow



Optional Wire Guard
Sold Separately
CWPS-WG-LG
CWPS-WG-SM

Included in Box:

Foam Pads, Mounting Screws,
External Screw Covers



LIGHT SPECIFICATIONS AND ELECTRICAL



PRODUCT CODE	SELECTABLE WATTS	CCT	LUMENS	EFFICACY	V	CRI	FACTORY SETTINGS	MAX CURRENT
CWPS-40W-3P-3CCT-UD	20W	3000K	2986 lm	149 lm/W	120-347V	82	40W 4000K	0.4A
		4000K	2991 lm	150 lm/W				
		5000K	3090 lm	154 lm/W				
	30W	3000K	4275 lm	142 lm/W				
		4000K	4333 lm	144 lm/W				
		5000K	4395 lm	146 lm/W				
	40W	3000K	5207 lm	130 lm/W				
		4000K	5501 lm	137 lm/W				
		5000K	5409 lm	135 lm/W				
CWPS-80W-3P-3CCT-UD	40W	3000K	5480 lm	137 lm/W	120-347V	82	80W 4000K	0.8A
		4000K	5650 lm	141 lm/W				
		5000K	5831 lm	146 lm/W				
	60W	3000K	7979 lm	133 lm/W				
		4000K	8321 lm	137 lm/W				
		5000K	8459 lm	141 lm/W				
	80W	3000K	10321 lm	129 lm/W				
		4000K	10942 lm	137 lm/W				
		5000K	10605 lm	133 lm/W				
CWPS-120W-3P-3CCT-UD	80W	3000K	10670 lm	133 lm/W	120-347V	80	120W 4000K	1.2A
		4000K	11027 lm	138 lm/W				
		5000K	11255 lm	141 lm/W				
	100W	3000K	13588 lm	136 lm/W				
		4000K	13866 lm	139 lm/W				
		5000K	13944 lm	139 lm/W				
	120W	3000K	15571 lm	130 lm/W				
		4000K	16420 lm	137 lm/W				
		5000K	16186 lm	135 lm/W				

DLC INFORMATION

PRODUCT CODE	PRIMARY USE	DLC ID	CLASSIFICATION
CWPS-40W-3P-3CCT-UD	Outdoor Full-Cutoff Wall-Mounted Area Luminaires	S-QHZIPG	Premium
	Outdoor Uplight-Emitting Wall-Mounted Area Luminaire	S-N9TTTW	Standard
CWPS-80W-3P-3CCT-UD	Outdoor Full-Cutoff Wall-Mounted Area Luminaires	S-CEQMF0	Premium
	Outdoor Uplight-Emitting Wall-Mounted Area Luminaire	S-WMXXPG	Premium
CWPS-120W-3P-3CCT-UD	Outdoor Full-Cutoff Wall-Mounted Area Luminaires	S-NWTC5D	Premium
	Outdoor Uplight-Emitting Wall-Mounted Area Luminaire	S-CLYV2H	Standard

Surge Protection	6kV
Auxiliary Output	12V
Power Factor	0.9
THD	15%
Operating Temp	-40°C to 45°C
Beam Angle	105°
Dimmable	0-10V
L70 Life	>54,000 hrs
Warranty	10-year

APPROVALS & RATINGS

cUL	E482965
IP Rating	IP65
IK Rating	IK05




CONSTRUCTION

Cord Whip	13.78"
Housing	Die-Cast Aluminum
Lens	Borosilicate Glass
Finish	Powder Coated
Finish Colour	Bronze

ACCESSORIES (Sold Separately)

		SHADED CELLS INDICATE COMPATIBILITY		
PRODUCT NUMBER	PRODUCT NAME	CWPS-40W-3P-3CCT-UD	CWPS-80W-3P-3CCT-UD	CWPS-120W-3P-3CCT-UD
CWPS-WG-LG	Large Wire Guard			
CWPS-WG-SM	Small Wire Guard			

MEASUREMENTS (IN) & WEIGHTS (LBS)

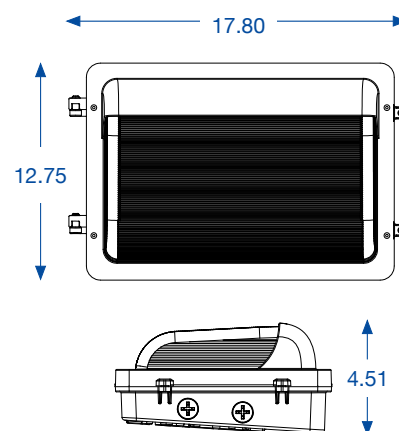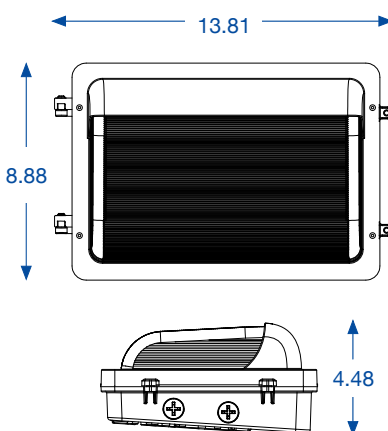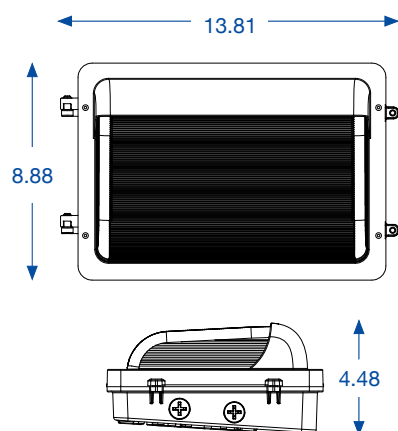

CWPS-40W-3P-3CCT-UD	
Product Meas.	13.81" x 8.88" x 4.48"
Fixture Weight	7.26 lbs
Carton Qty	1
Carton G.W.	9.24 lbs
Carton Meas.	15.1" x 10.6" x 6.5"

CWPS-80W-3P-3CCT-UD	
Product Meas.	13.81" x 8.88" x 4.48"
Fixture Weight	7.26 lbs
Carton Qty	1
Carton G.W.	9.24 lbs
Carton Meas.	15.1" x 10.6" x 6.5"

CWPS-120W-3P-3CCT-UD	
Product Meas.	17.80" x 12.75" x 4.51"
Fixture Weight	12.76 lbs
Carton Qty	1
Carton G.W.	15.62 lbs
Carton Meas.	18.9" x 14.7" x 6.7"

BRITISH COLUMBIA

1140-2375 Fremont St, Port Coquitlam,
BC V3B 0N9 | (778) 730-0448

ALBERTA

13-2355 52 Ave SE Calgary, AB
T2C 4X7 | (403) 907-0212

ONTARIO

8-540 Jamieson Pkwy, Cambridge, ON
N3C 0G5 | (519) 880-9833